





PAVO-PROMET VENT<sup>®</sup>...

# Helios MiniVent M1 serija

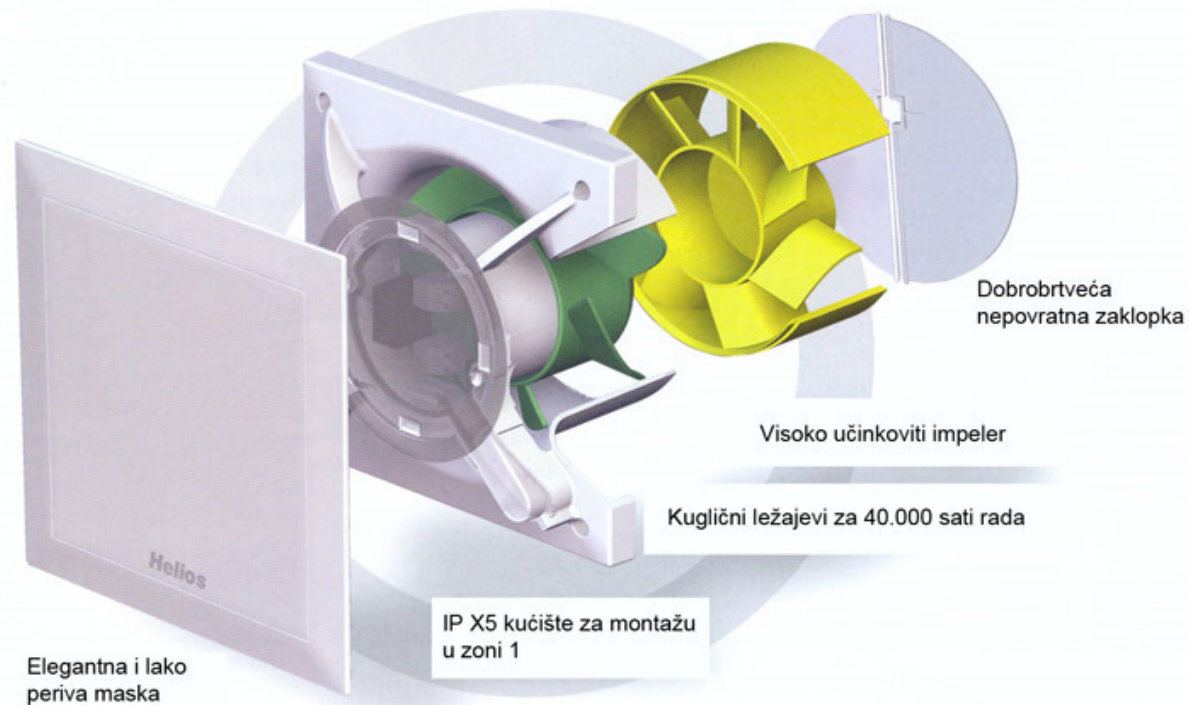




PAVO-PROMET VENT<sup>®</sup> d.o.o.

# Helios MiniVent M1 serija

## Osnovne karakteristike:

- modeli Minivent M1/100 –M1/120-M1/150,
- svi modeli su dvobrzinski,
- relativno visoki raspoloživi tlak
- stupanj zaštite IP X5 (montaža u zoni 1),
- nizak nivo buke zahvaljujući ultra silence tehnologiji,
- niska potrošnja el. energije,
- serijski ugrađena nepovratna zaklopka (lagana za demontažu),
- nagrađivan dizajn





# Helios MiniVent M1 serija

Tip	M1 100	M1 100 N/C	M1 100 F	M1 100 P	M1 120	M1 120 N/C	M1 120 F	M1 120P	M1 150	M1 150 N/C	M1 150 F	M1 150 0-10V
Produlj. vrijeme rada (min)	-	6,12,1 8,24	6,12,1 8,24	6	-	6,12,1 8,24	6,12,1 8,24	6	-	6,12,1 8,24	6,12,1 8,24	-
Intervalni rad (sati)	-	4,8, 12,24	-	-	-	4,8, 12,24	-	-	-	4,8, 12,24	-	-
Odgođ. uključ. (s)	-	0,45, 90, 120	0 ili 45	-	-	0,45, 90,12 0	0 ili 45	-	-	0,45, 90, 120	0 ili 45	-
Protok zraka (m <sup>3</sup> /h)	90/ 75	90/ 75	90/ 75	90/ 75	170/1 50	170/ 150	170/ 150	170/ 150	260/ 220	260/ 220	260/ 220	260/ 220
Potrošnja el. en. (W)	9/5	9/5	9/5	9/5	13/10	13/10	13/10	13/10	10/6	10/6	10/6	10/6
Nivo zvučnog tlaka (dB)	30/ 25	30/ 25	30/ 25	30/ 25	36/ 32	36/ 32	36/ 32	36/ 32	39/ 35	39/ 35	39/ 35	39/ 35

- Svi M1/150 modeli opremljeni su EC motorima






PAVO-PROMET VENT<sup>®</sup>...

# Helios MiniVent M1 serija

Modeli s automatskom kontrolom vlage – M1/100/120/150 F

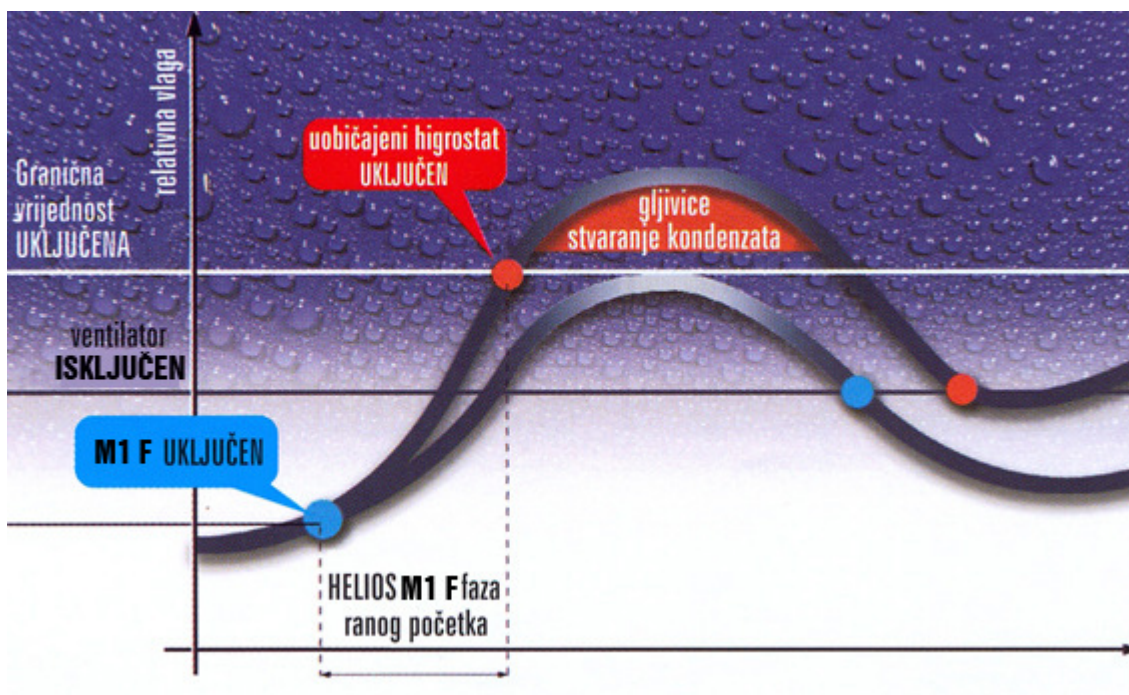


- Tehnologija ranog prepoznavanja brzog porasta vlage






# Helios MiniVent M1 serija


## M1/100

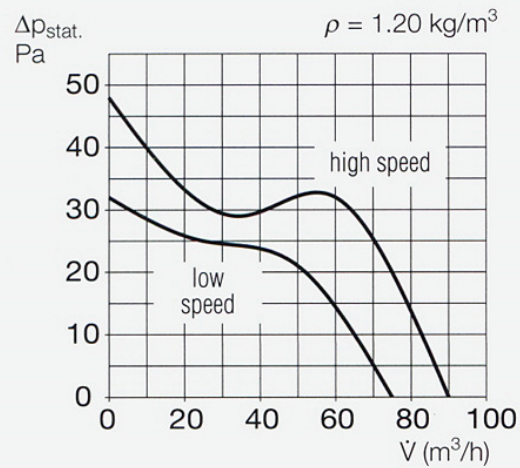

## M1/120

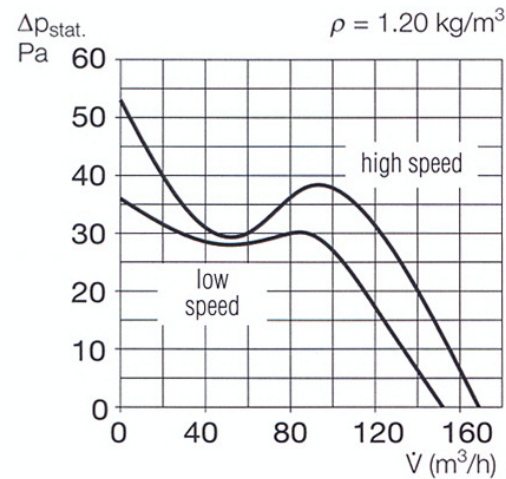

## M1/150

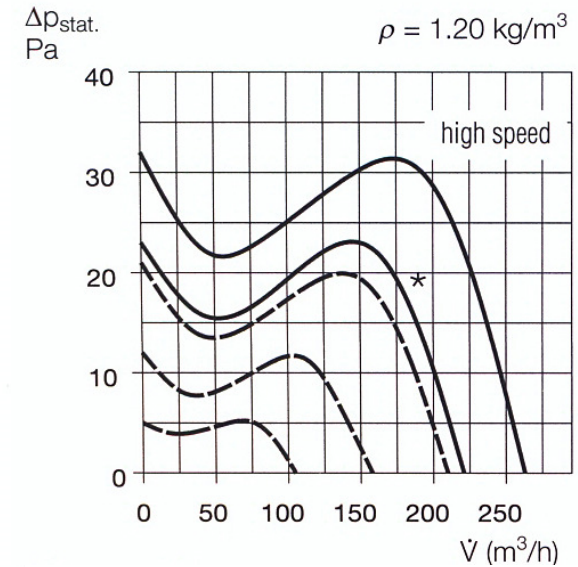

- visoki raspoloživi tlak svih modela

